

# 1230ERV

## ENGINEERING DATA

### TOTAL RECOVERY CORES

The cross-flow energy recovery cores transfer heat and water vapour between the two airstreams. They are easily removed for cleaning or service.

### MOTORS

Two PSC, 3 speed double shafted, 120 VAC, 9.4 Amps each (18.8 total on high speed). HP- 1/2, 1625 RPM. MCA: 23.5 MOP: 30 Watts - total on high speed - 2256.

### FILTERS

2" pleated MERV 8 filters in supply and exhaust air streams.

### BLOWERS

Slide in / out easily of unit. Centrifugal type rated at 1200 CFM (566 L/s) free air delivery. Each air stream has one single shafted motor driving a centrifugal blower.

**CONNECTION DUCT SIZES** - Four - 20" x 8" (508 mm x 200 mm).

### MOUNTING

Unit to be set on support brackets hung by threaded rod type apparatus (brackets and rods not provided).

### CABINET

Unit has front and back access doors and electrical panel can be switched to either side giving installer flexibility in duct direction. 20 gauge prepainted galvanized steel (G60) for superior corrosion resistance. Insulated with foil faced insulation where required to prevent exterior condensation.

### ELECTRONICS

Integrated microprocessor circuit board. Built-in interlock contacts. Optional remote speed control.

### FROST PREVENTION

Temperature sensor activated, periodically shuts down supply motor. Drains not required.

**WEIGHT** 285 LBS (130 KG) **SHIPPING WEIGHT** 335 LBS. (152 KG)

### CONTROL OPTION

#### 99-BC04 Lifebreath Ventilation Control

- 2 speed fan setting (Low/High)
- 2 modes of operation: Ventilation, 20/40
- Compatible with 99-DET02 Wireless Timers
- 3 wire connection; 20 gauge wire (minimum)

## WARRANTY


Units carry a 10 year warranty on the ERV core and a 2 year replacement parts warranty.

## DIMENSIONS inches (mm)


**NOTE:** The 1230ERV model may easily be reversed in the field. Refer to page 22 for installation instructions.

All units conform to CSA and UL standards

**NOTE:** All specifications are subject to change without notice.

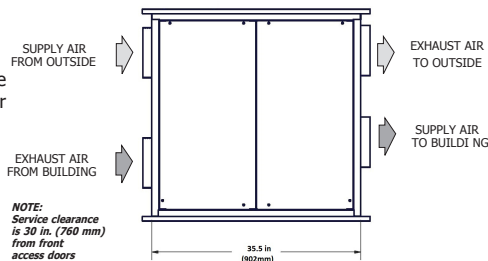


FRONT VIEW

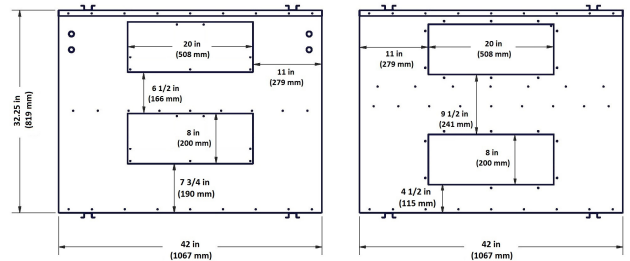

DISCHARGE SIDE

INLET SIDE

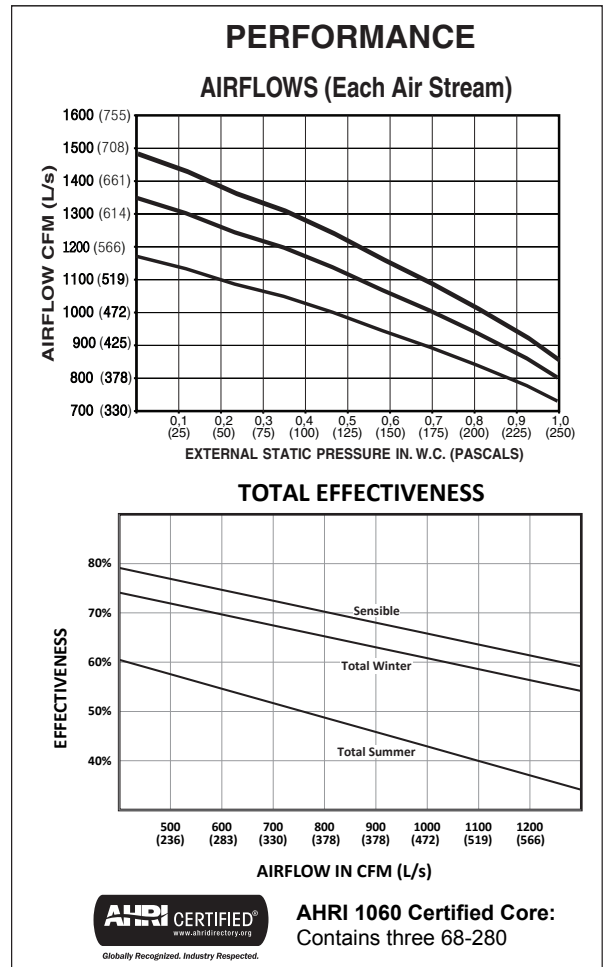

### TIMER OPTIONS

#### 99-DET01 Lifebreath 20/40/60 Minute Timer

- Initiates high speed Ventilation for 20, 40 or 60 minutes
- 3 wire connection; 20 gauge wire (minimum)

#### 99-DET02 Lifebreath WIRELESS 20/40/60 Minute Timer

- Initiates high speed Ventilation for 20, 40 or 60 minutes
- Wirelessly connects to main control for ease of installation
- 40' approximate range

#### 99-RX02 Lifebreath WIRELESS Repeater

- Used to extend range of 99-DET02 Wireless Timers when Timers are out of range
- Plugs into 120V power outlet and wirelessly connects to main control and 99-DET02

Date: \_\_\_\_\_

Tag: \_\_\_\_\_ Qty: \_\_\_\_\_

Project: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_

Supplier: \_\_\_\_\_

Quote#: \_\_\_\_\_

Submitted by: \_\_\_\_\_