

METRO 120ERVD

ENERGY RECOVERY VENTILATOR



ENGINEERING DATA

TOTAL RECOVERY CORE

Cross-flow energy recovery core transfers heat and water vapor between two air-streams. Easily removed for cleaning or service.

MOTORS AND BLOWERS

Each airstream has an independent motorized impeller with multiple fan speed operation.

INTELLIGENT DEFROST DAMPER MOTOR

- Smart damper motor with integrated circuit board
- Energy efficient DC motor
- Power saving standby mode when not cycling
- Integrated ice breaker technology
- Temperature compensated torque for reliable operation in any application
- Auto-sensed memory storage of opened and closed positions
- Soft sealing for extended part life

FILTERS

Washable antimicrobial MERV 6 air filters in exhaust and supply air streams.

MOUNTING

Mounting brackets supplied

DEFROST

Temperature sensor activated, recirculating damper defrost.

CASE

20 gauge prepainted galvanized steel for superior corrosion resistance. Insulated to prevent exterior condensation.

INSTALLER SELECTABLE HIGH SPEED SETTINGS

Highest speed, "H3" is the factory setting. Installers may select a lower high speed on set up. See chart for airflows H1, H2, and H3.

ELECTRONICS

Main control can be wall mounted in a central location. 3 wire 20 gauge (min.) 100 ft. length (max.)

OPTIONAL ACCESSORIES:

TechGrille
99-EAG4
99-EAG5
99-EAG6
99-EAG8



Terminator Fitting
99-TM4
99-TM5



Wireless 20/40/60 Min Timer
99-DET02



Dual Hood
99-190



Weather Hoods
99-185



LIFEBREATH CONTROL OPTIONS


FEATURES	99-DXPL02	99-BC02	99-BC03	99-BC04
5 speed fan operation on each mode	✓			
2 speed fan operation (Low/High)		✓		✓
Continuous low speed fan operation			✓	
Humidity control through adjustable Dehumidistat	✓	✓	✓	
Large digital LCD screen	✓			
LED status indicator lights		✓	✓	✓
Continuous Ventilation	✓	✓	✓	✓
Continuous Recirculation	✓		✓	
20 ON/40 OFF	✓			
10 ON/50 OFF	✓			
20 ON/40 Recirculation	✓		✓	✓
20/40/60 min. High speed override button	✓			
Compatible with 99-DET02 Wireless Timer	✓	✓	✓	✓
3 wire connection	✓	✓	✓	✓

TIMER OPTIONS

99-DET01 - Lifebreath 20/40/60 Minute Timer
Initiates high speed ventilation for 20, 40 or 60 minutes. 3 wire connection.

99-DET02 - Wireless Lifebreath 20/40/60 Minute Timer
Initiates high speed ventilation for 20, 40 or 60 minutes. Wirelessly connects to main control for ease of installation. 40' approximate range.
Exclusive to Lifebreath.

99-RX02 - Wireless Lifebreath Repeater
Extends range of 99-DET02 Wireless Timers. Plugs into 120V power outlet. Wirelessly connects to main control and 99-DET02. Install at halfway point between timer and main wall control if timer is out of range.



99-DXPL02



99-DET02



www.lifebreath.com

METRO 120ERVD

ENERGY RECOVERY VENTILATOR




PERFORMANCE (HVI CERTIFIED)

IN. W.G. (PA)	0.2 (50) CFM (L/s)	0.3 (75) CFM (L/s)	0.4 (100) CFM (L/s)	0.5 (125) CFM (L/s)	0.6 (150) CFM (L/s)	0.7 (175) CFM (L/s)	0.8 (200) CFM (L/s)	0.9 (225) CFM (L/s)
Net Supply Airflow	129 (61)	125 (59)	123 (58)	119 (56)	112 (53)	108 (51)	102 (48)	95 (45)
Gross Supply Airflow	131 (62)	127 (60)	123 (58)	119 (56)	114 (54)	108 (51)	104 (49)	95 (45)
Gross Exhaust Airflow	131 (62)	127 (60)	123 (58)	119 (56)	114 (54)	108 (51)	102 (48)	95 (45)

ELECTRICAL SPECIFICATIONS	
VAC @ 60Hz	120
Watts / Low Speed	62
Watts / High Speed	158
Amp Rating	1.4

Sensible Effectiveness (ASE) @ 49 CFM (23 L/s)	32°F (0°C)	83%
Sensible Efficiency (SRE) @ 49 CFM (23 L/s)	32°F (0°C)	73%
Sensible Efficiency (SRE) @ 64 CFM (30 L/s)	32°F (0°C)	72%
Sensible Efficiency (SRE) @ 53 CFM (25 L/s)	-13°F (-25°C)	54%
Total Efficiency (TRE) @ 64 CFM (30 L/s)	95°F (35°C)	44%

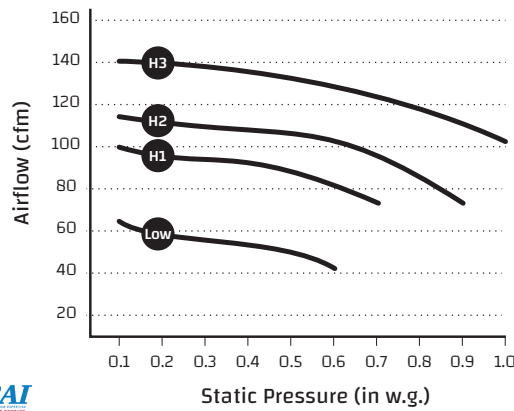


WEIGHT:
37 LBS (16.8 KG)

SHIPPING WEIGHT:
39 LBS (17.7 KG)

NOTE:
Front clearance of 25 in. (635 mm) is recommended for servicing unit. All ducts use 5 in. (125 mm) round collars.



DIMENSIONS

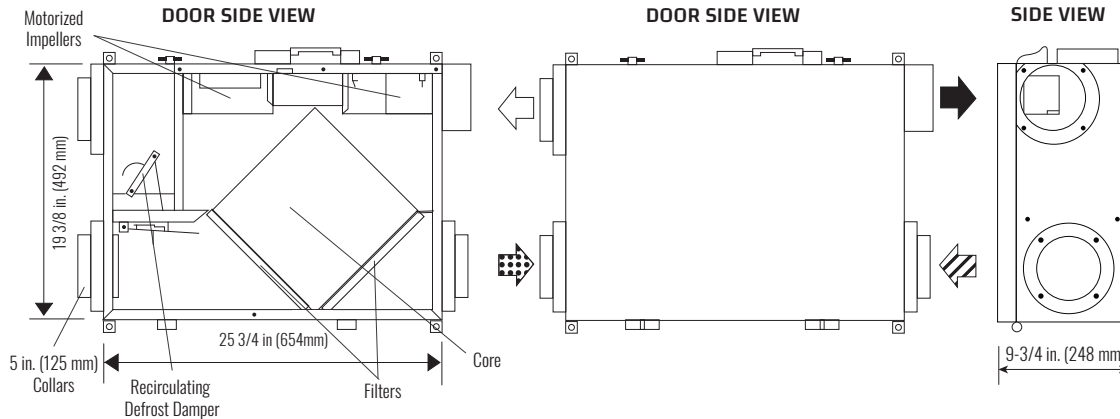

Date: _____

Contractor: _____

Tag: _____

Supplier: _____

Project: _____ Qty: _____

Quote #: _____

Engineer: _____

Submitted By: _____

Control: _____

Timer: _____ Timer Qty: _____

WARRANTY

Units carry a 5 year warranty on the enthalpic (ERV) core and a 5 year replacement parts warranty.

All units conform to CSA and UL standards

