

# METRO 120ERVD

## ENERGY RECOVERY VENTILATOR

Cold weather certified for year-round ventilation



### BRINGING COMPACT TO A WHOLE NEW LEVEL

- Designed for high-rise condos, apartments and townhomes with limited mechanical space
- Low profile, fits in bulkhead and drop ceilings, slim height 9.75 in.
- 50-130 CFM operational range
- 3 High speed selections
- Brackets included for easy install
- No drains required
- Intelligent Damper Defrost
  - Energy efficient DC motor
  - Power saving standby mode when not cycling
  - Integrated ice breaker technology
- Removable motor and electronic assembly for easy maintenance and service
- Swing open e-box cover for quick access to circuit board and DIP switches
- Convenient hinged door – no screws

### ENGINEERING DATA:

#### TOTAL RECOVERY ERV CORE

Cross-flow energy recover core transfers heat and water vapor between two airstreams. It is easily removed for cleaning or service.

#### MOTORS AND BLOWERS

Each airstream has an independent centrifugal blower with multiple fan speed operation.

#### FILTERS

Washable MERV-6 air filters in exhaust and supply airstreams. Upgrade to MERV-13 option available.

#### MOUNTING

Mounting brackets supplied.

#### DEFROST

Temperature sensor activated, recirculating damper defrost. Drains not required.

#### CASE

20 gauge prepainted galvanized steel for superior corrosion resistance, insulated to prevent exterior condensation.

#### INSTALLER SELECTABLE HIGH SPEED SETTINGS

Adjustable DIP switches are located on the circuit board, Hi3 is the factory setting. Refer to the installation manual for adjustment instructions.

#### ELECTRONICS

Main control can be wall mounted in a central location. 3 wire 20 gauge (min.) 100 ft. length (max.)

### OPTIONAL ACCESSORIES:

**Dual Hood**  
99-190  
99-194



**Weather Hood**  
99-185  
99-186  
99-187



**TechGrille**  
99-EAG4  
99-EAG5  
99-EAG6  
99-EAG8



**Terminator Fitting**  
99-TM4  
99-TM5  
99-TM6



### LIFEBREATH CONTROL OPTIONS

FEATURES	99-DXPLO2	99-BC02	99-BC03	99-BC04
5 speed fan operation on each mode	✓			
2 speed fan operation (Low/High)		✓		✓
Continuous low speed fan operation	✓	✓	✓	✓
Humidity control through adjustable Dehumidistat	✓	✓	✓	
Large digital LCD screen	✓			
LED status indicator lights		✓	✓	✓
Continuous Ventilation	✓	✓	✓	✓
Continuous Recirculation*	✓		✓	
20 ON/40 OFF	✓		✓	✓
10 ON/50 OFF	✓			
20 ON/40 Recirculation*	✓		✓	✓
20/40/60 min. High speed override button	✓			
Compatible with 99-DET02 Wireless Timer	✓	✓	✓	✓
3 wire connection	✓	✓	✓	✓

\*Recirculation features not available on fan defrost models.

### TIMER OPTIONS

#### 99-DET01 - 20/40/60 Minute Timer

Initiates high speed ventilation for 20, 40 or 60 minutes. 3 wire connection.

#### 99-DET02 - 20/40/60 Minute Timer

Initiates high speed ventilation for 20, 40 or 60 minutes. Wirelessly connects to main control for ease of installation. 40 ft approximate range.

#### 99-RX02 - Wireless Repeater

Extends range of 99-DET02 Wireless Timers. Plugs into 120V power outlet. Wirelessly connects to main control and 99-DET02. Install at halfway point between timer and main wall control if timer is out of range.



99-BC02

99-BC03

99-BC04

99-DET02

99-DET01

# METRO 120ERVD

## ENERGY RECOVERY VENTILATOR




### PERFORMANCE (HVI CERTIFIED)

IN. W.G. (PA)	0.2 (50) CFM (L/s)	0.3 (75) CFM (L/s)	0.4 (100) CFM (L/s)	0.5 (125) CFM (L/s)	0.6 (150) CFM (L/s)	0.7 (175) CFM (L/s)	0.8 (200) CFM (L/s)	0.9 (225) CFM (L/s)
Net Supply Airflow	129 (61)	125 (59)	123 (58)	119 (56)	112 (53)	108 (51)	102 (48)	95 (45)
Gross Supply Airflow	131 (62)	127 (60)	123 (58)	119 (56)	114 (54)	108 (51)	104 (49)	95 (45)
Gross Exhaust Airflow	131 (62)	127 (60)	123 (58)	119 (56)	114 (54)	108 (51)	102 (48)	95 (45)

ELECTRICAL SPECIFICATIONS	
VAC @ 60Hz	120
Watts / Low Speed	62
Watts / High Speed	158
Amp Rating	1.4

Sensible Effectiveness (ASE) @ 49 CFM (23 L/s)	32°F (0°C)	83%
Sensible Efficiency (SRE) @ 49 CFM (23 L/s)	32°F (0°C)	73%
Sensible Efficiency (SRE) @ 64 CFM (30 L/s)	32°F (0°C)	72%
Sensible Efficiency (SRE) @ 53 CFM (25 L/s)	-13°F (-25°C)	54%
Total Efficiency (TRE) @ 64 CFM (30 L/s)	95°F (35°C)	44%

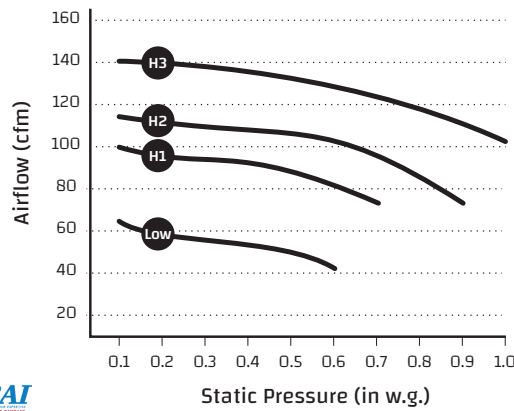

WEIGHT:  
**37 LBS (16.8 KG)**


SHIPPING WEIGHT:  
**39 LBS (17.7 KG)**

**NOTE:**

Front clearance of 25 in. (635 mm) is recommended for servicing unit. All ducts use 5 in. (125 mm) round collars.



### DIMENSIONS

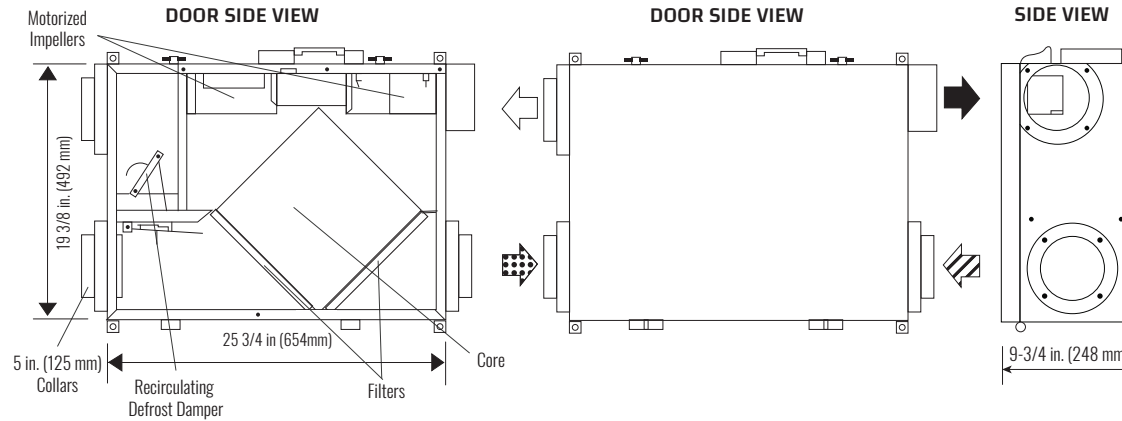

**Airflow:**

- ↔ Stale Air to Outside
- ↔ Fresh Air from Outside
- ↔ Stale Air from Inside
- ➔ Fresh Air to Inside

Date: \_\_\_\_\_

Contractor: \_\_\_\_\_

Tag: \_\_\_\_\_

Supplier: \_\_\_\_\_

Project: \_\_\_\_\_ Qty: \_\_\_\_\_

Quote #: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted By: \_\_\_\_\_

Control: \_\_\_\_\_

Timer: \_\_\_\_\_ Timer Qty: \_\_\_\_\_

**WARRANTY**

Units carry a 5 year warranty on the enthalpic (ERV) core and a 5 year replacement parts warranty.

All units conform to CSA and UL standards



www.lifebreath.com