

180 ERVD-FID

ENERGY RECOVERY VENTILATOR



SUPERIOR PERFORMANCE TOP CHOICE ERV

The compact design of the 180 ERVD model combined with superior performance, makes LifeBreath the top choice. Features a top port design, 5 in. duct connections and our ERV core.

- HVI Cold weather certified ERV
- Enthalpy energy exchange core
- Intelligent defrost damper motor
 - Smart damper with integrated circuit board
 - Energy-efficient DC motor
 - Power-saving standby mode
 - Integrated Ice Breaker technology
- Energy Star Certified

ENGINEERING DATA:

FAULT INDICATION DISPLAY (FID)
Title 24 Compliant. A FID enabled HRV or ERV is capable of displaying error codes for certain types of faults which impact operation of the system.

TOTAL RECOVERY CORE
Cross-flow energy recovery core transfers heat and water vapor between two airstreams. Easily removed for cleaning or service.

MOTORS AND BLOWERS
High Efficiency EC motors. Each airstream has an independent motorized impeller with multiple fan speed operation.

FILTERS
Washable MERV-6 air filters in exhaust and supply airstreams. Upgrade to MERV-13 option available.

MOUNTING
Adjustable hanging straps supplied.

DEFROST
Recirculating damper defrost system.

CASE
20 gauge prepainted galvanized steel for superior corrosion resistance, insulated to prevent exterior condensation.

ELECTRONICS
Main control can be wall mounted in a central location. 3 wire 20 gauge (min.) 100 ft. length (max.)

OPTION FEATURES
Hardwired, and mirrored are available.

OPTIONAL ACCESSORIES:

Dual Hood
99-190
99-194



Weather Hood
99-185
99-186
99-187



TechGrille
99-EAG4
99-EAG5
99-EAG6
99-EAG8



Terminator Fitting
99-TM4
99-TM5
99-TM6



LIFEBREATH DXPL-O3 FEATURES

5 speed fan operation on each mode	✓
2 speed fan operation (Low/High)	✓
Continuous low speed fan operation	✓
Humidity control through adjustable Dehumidistat	✓
Large digital LCD screen	✓
Continuous Ventilation	✓
Continuous Recirculation	✓
20 ON/40 OFF	✓
10 ON/50 OFF	✓
20 ON/40 Recirculation	✓
20/40/60 min. High speed override button	✓
Compatible with 99-DET02 Wireless Timer	✓
3 wire connection	✓
Auto Balance	✓
Fault Indication Display	✓

TIMER OPTIONS

99-DET01 - 20/40/60 Minute Timer

Initiates high speed ventilation for 20, 40 or 60 minutes. 3 wire connection.

99-DET02 - 20/40/60 Minute Timer

Initiates high speed ventilation for 20, 40 or 60 minutes. Wirelessly connects to main control for ease of installation. 40 ft approximate range.

99-RX02 - Wireless Repeater

Extends range of 99-DET02 Wireless Timers. Plugs into 120V power outlet. Wirelessly connects to main control and 99-DET02. Install at halfway point between timer and main wall control if timer is out of range.



99-DXPLO3



99-DET01



99-DET02



99-RX02

*Recirculation features not available on fan defrost models.

180 ERVD-FID

ENERGY RECOVERY VENTILATOR




PERFORMANCE

IN. W.G. (PA)	0.1 (25) CFM (L/s)	0.2 (50) CFM (L/s)	0.3 (75) CFM (L/s)	0.4 (100) CFM (L/s)	0.5 (125) CFM (L/s)	0.6 (150) CFM (L/s)	0.7 (175) CFM (L/s)	0.8 (200) CFM (L/s)	0.9 (225) CFM (L/s)	1.0 (250) CFM (L/s)
Net Supply Airflow	195 (92)	186 (88)	178 (84)	172 (81)	165 (78)	159 (75)	153 (72)	144 (68)	136 (64)	127 (60)
Gross Supply Airflow	197 (93)	191 (90)	182 (86)	176 (83)	170 (80)	161 (76)	155 (73)	148 (70)	140 (66)	131 (62)
Gross Exhaust Airflow	193 (91)	182 (86)	174 (82)	165 (78)	159 (75)	153 (72)	146 (69)	140 (66)	133 (63)	125 (59)

ELECTRICAL SPECIFICATIONS	
VAC @ 60Hz	120
*Watts @ 67CFM (32 L/s)	26
Amp Rating	1.86

*Sensible Effectiveness (ASE) @ 67 CFM (32 L/s)	32°F (0°C)	83%
*Sensible Efficiency (ASRE) @ 96 CFM (32 L/s)	32°F (0°C)	79%
Sensible Efficiency (SRE) @ 67 CFM (32 L/s)	32°F (0°C)	77%
Sensible Efficiency (SRE) @ 96 CFM (45 L/s)	32°F (0°C)	73%
Sensible Efficiency (SRE) @ 66 CFM (31 L/s)	13°F (-25°C)	60%
Total Efficiency (TRE) @ 65 CFM (31 L/s)	95°F (35°C)	50%

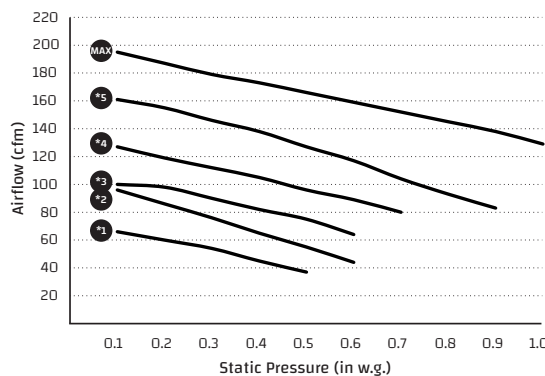

WEIGHT:
53 LBS (24 KG)

SHIPPING WEIGHT:
56 LBS (25 KG)

NOTE:
Front clearance of 25 in. (635 mm) is recommended for servicing unit. All ducts use 5 in. (125 mm) round collars. Balancing dampers are located on all collars.




MERV 13 Upgrade: 65-195-6R



* Not an HVI certified data point



DIMENSIONS

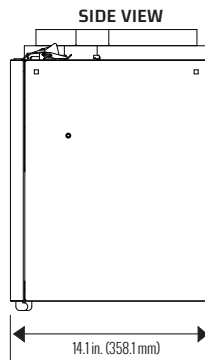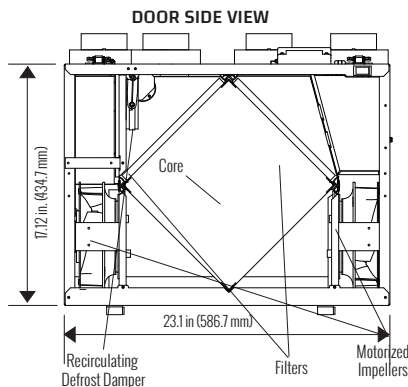

Date: _____

Contractor: _____

Tag: _____

Supplier: _____

Project: _____ Qty: _____

Quote #: _____

Engineer: _____

Submitted By: _____

Control: _____

Timer: _____ Timer Qty: _____

WARRANTY

Units carry a 5 year warranty on the enthalpic (ERV) core and a 5 year replacement parts warranty.

All units conform to CSA and UL standards

